

University of Washington / Nasser Marafi, Jeffrey Berman, Marc Eberhard, Andrew Makdisi

Background and Motivation


- The Cascadia Subduction Zone (CSZ) is capable of producing an M9 earthquake that causes long-duration shaking in the Pacific Northwest (PNW).
- The Puget Sound region is underlain by a deep sedimentary basin that is known to amplify the long-period ground-motion frequency content.
- The USGS estimates that an M9 CSZ earthquake has a 500-year return period with a 10-14% chance of occurrence in the next 50 years.
- The impacts of an M9 CSZ earthquake on buildings in the PNW is largely unknown because there are currently no recordings of an M9 earthquakes in the region.

Objectives

- Study the impact of an M9 CSZ earthquake on a suite of buildings in Seattle using (1) ground-motions derived from physics-based simulations and (2) numerical models that capture the structure's non-linear response.

Physics-Based Simulations


- Frankel et al. (2018) generated over 30 realizations of an M9 CSZ scenario which are largely based on the logic trees that make up the National Seismic Hazard Maps.

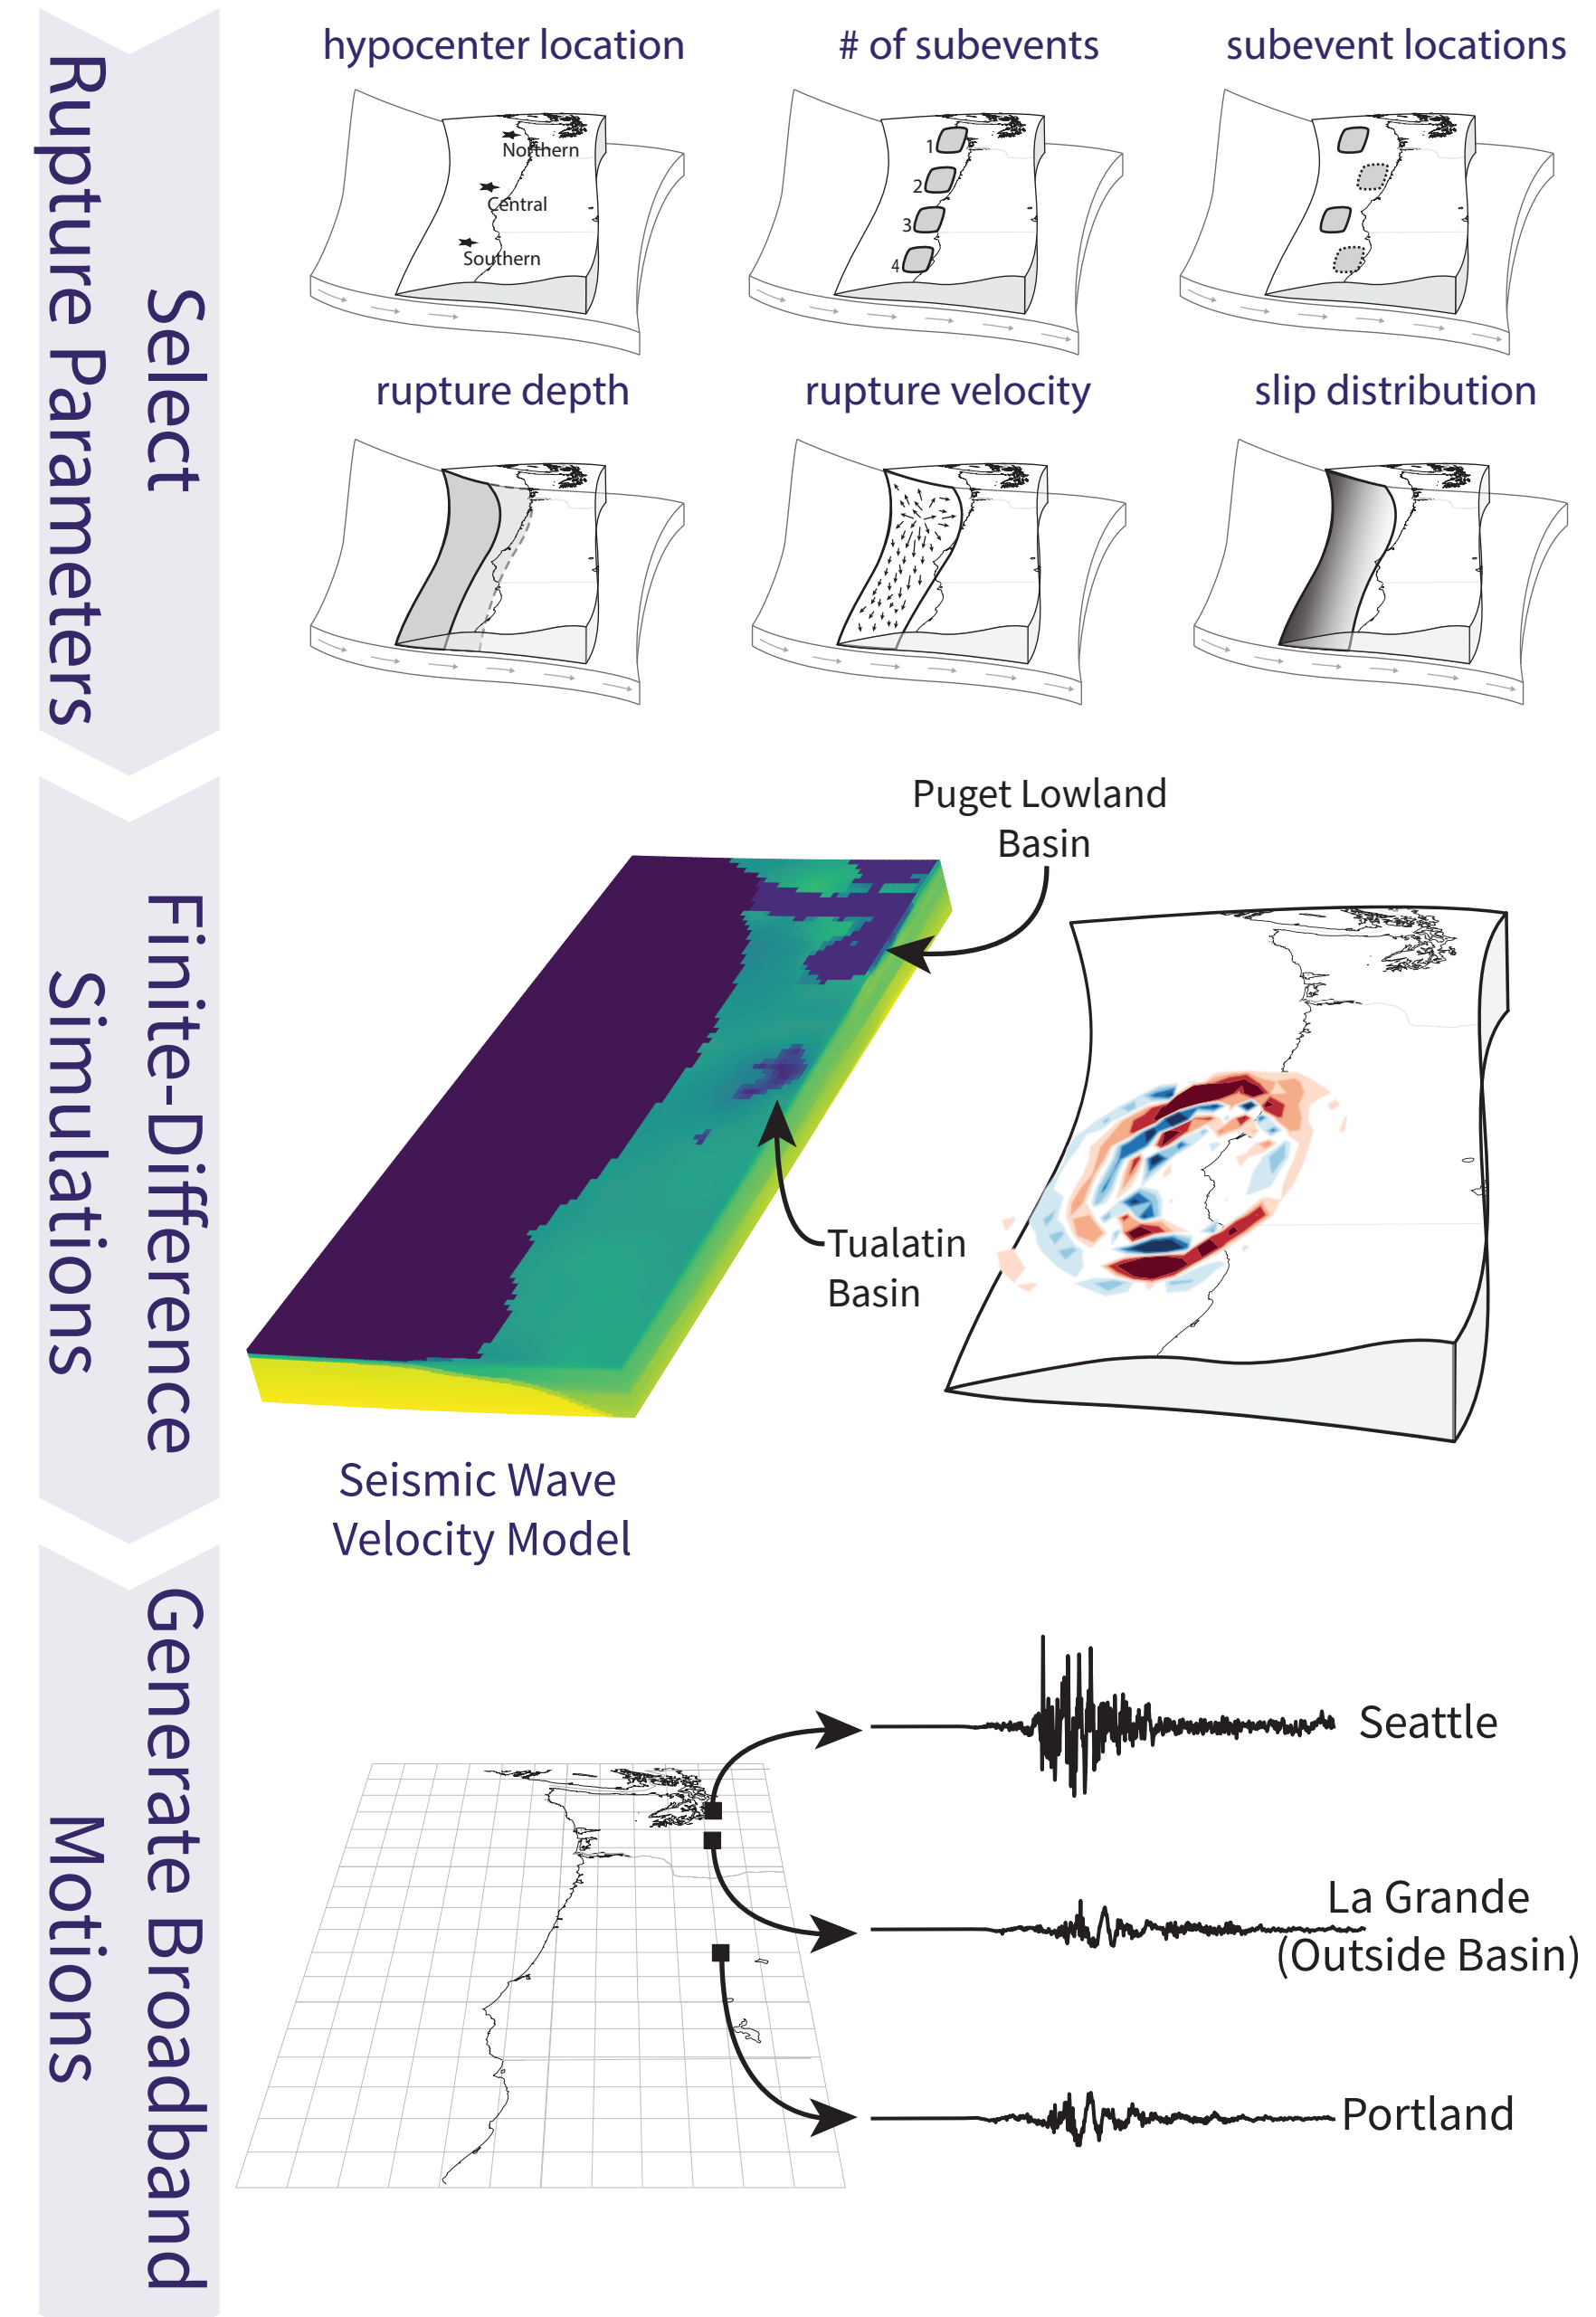

Deep Sedimentary Basin


- Tall buildings in Seattle are founded on glacially compacted till with a shear-wave velocity reaching up to 500 m/s near the surface.
- Hard rock with shear-wave velocity equal to 2,500 m/s is around 8 km below the city of Seattle.

PUGET LOWLAND BASINS

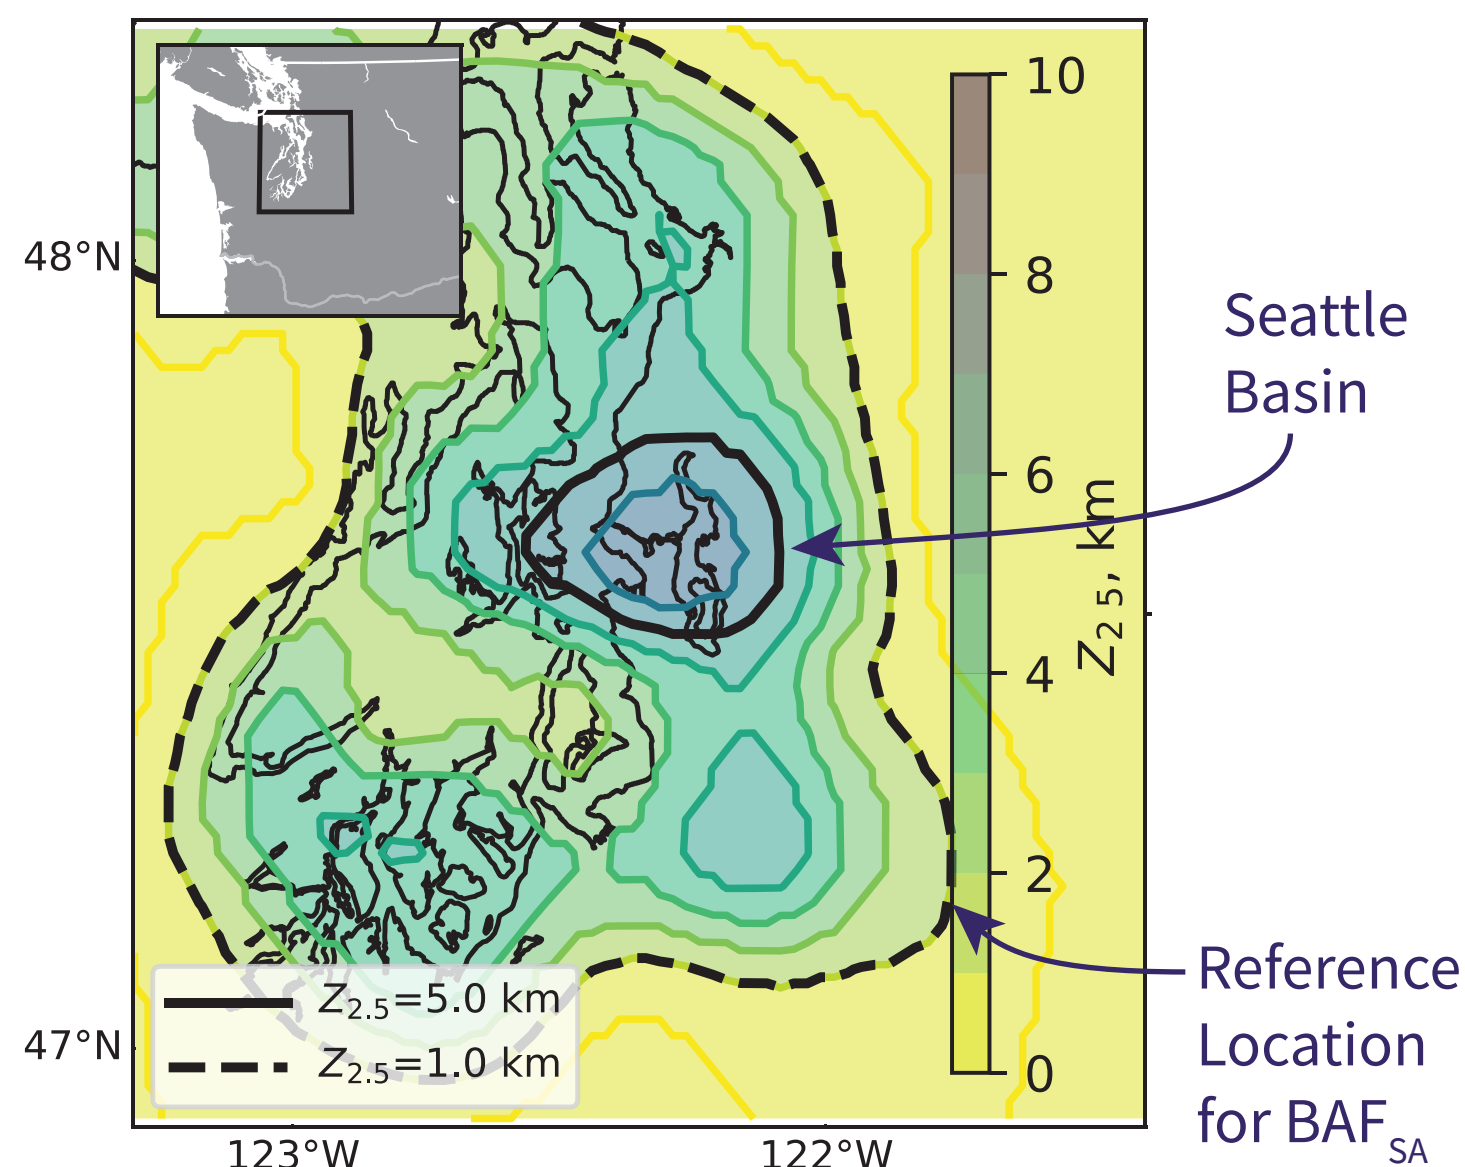


Basin Amplification

- The Puget Lowland basin amplified spectral accelerations up to 5 times larger on average.

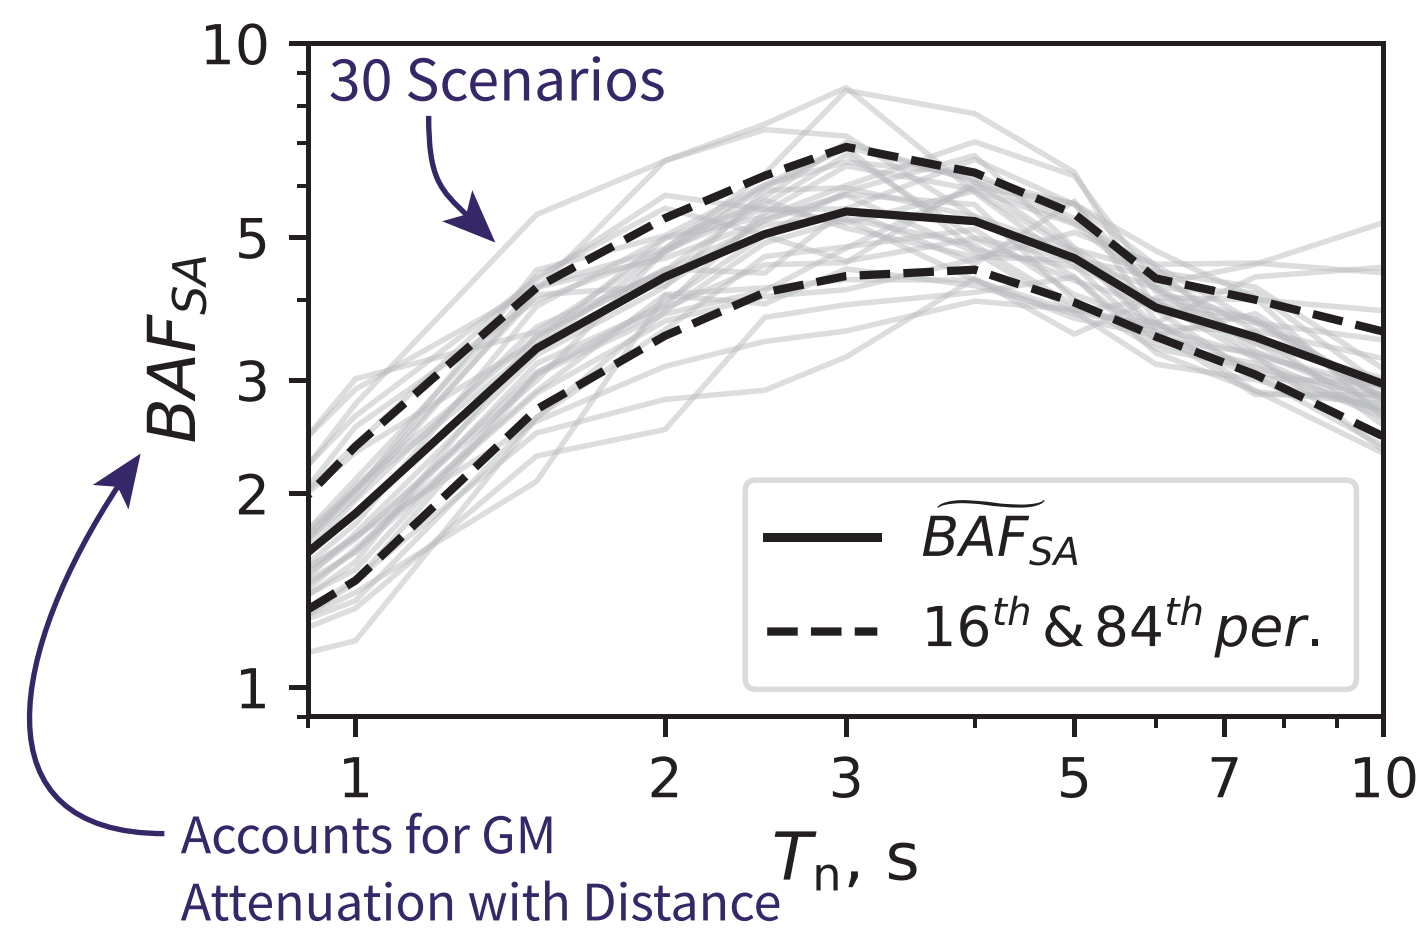


Spectral Acceleration

- Median spectral accelerations from an M9 CSZ earthquake is found to be larger than the MCE_R for periods between 1 to 3s.

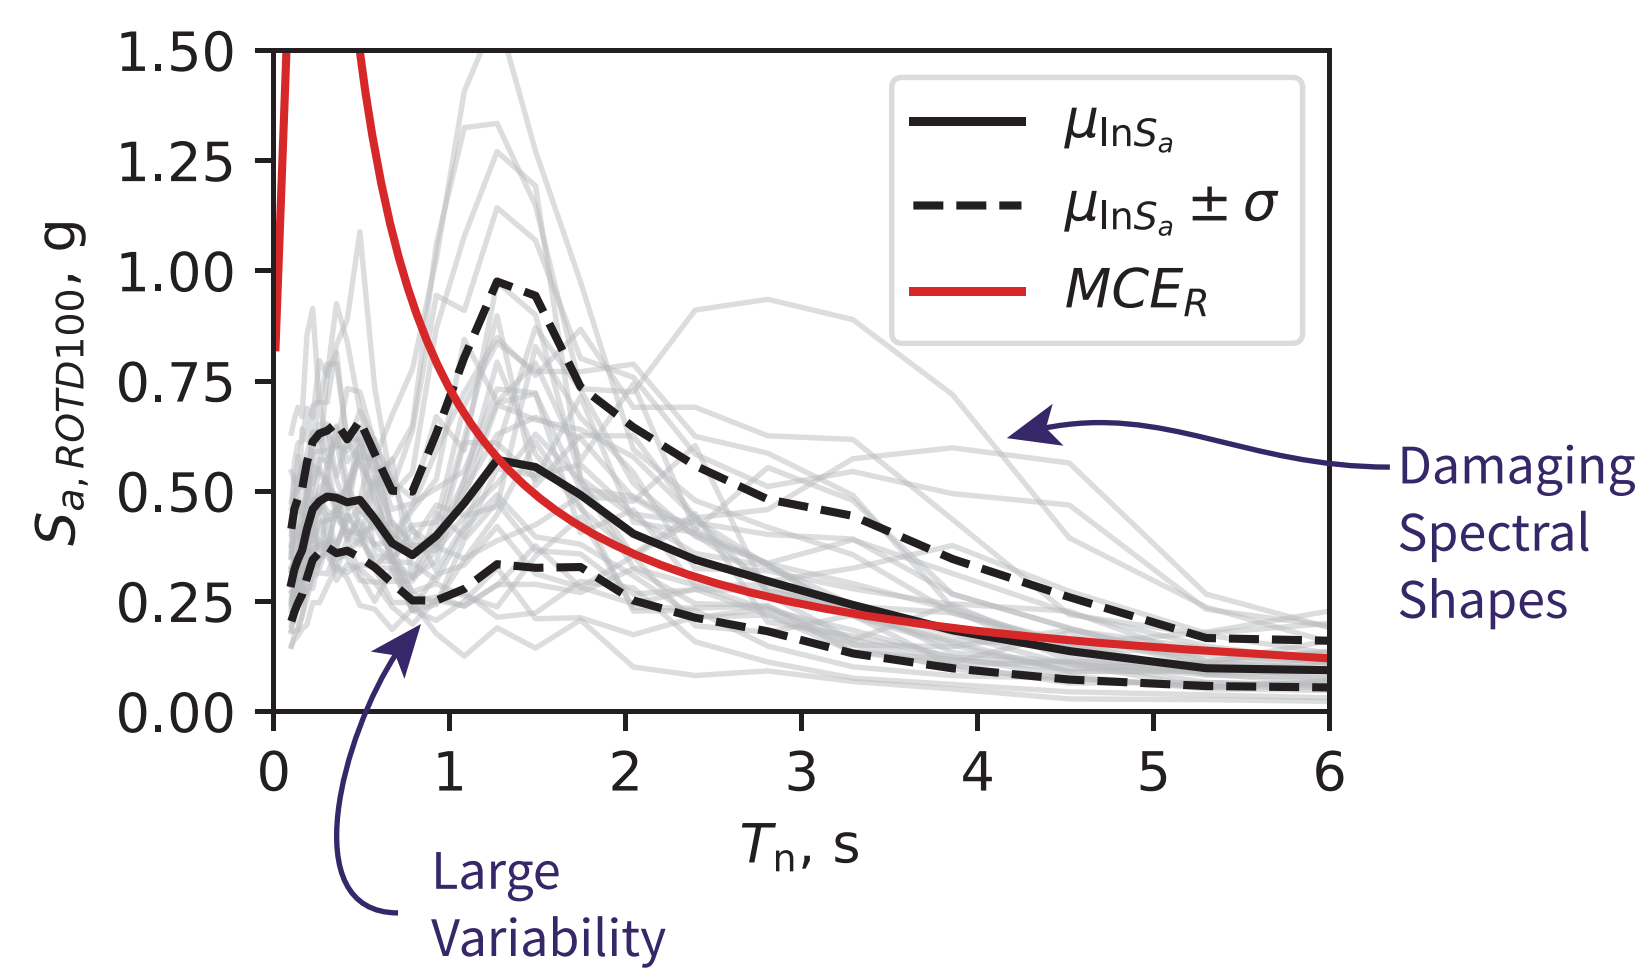

Ground Motion Duration

- The 5-95% Significant Duration ($D_{s,5-95}$) was found to increase with closest distance to rupture (R_{CD}) and is around 120 s long in Seattle.

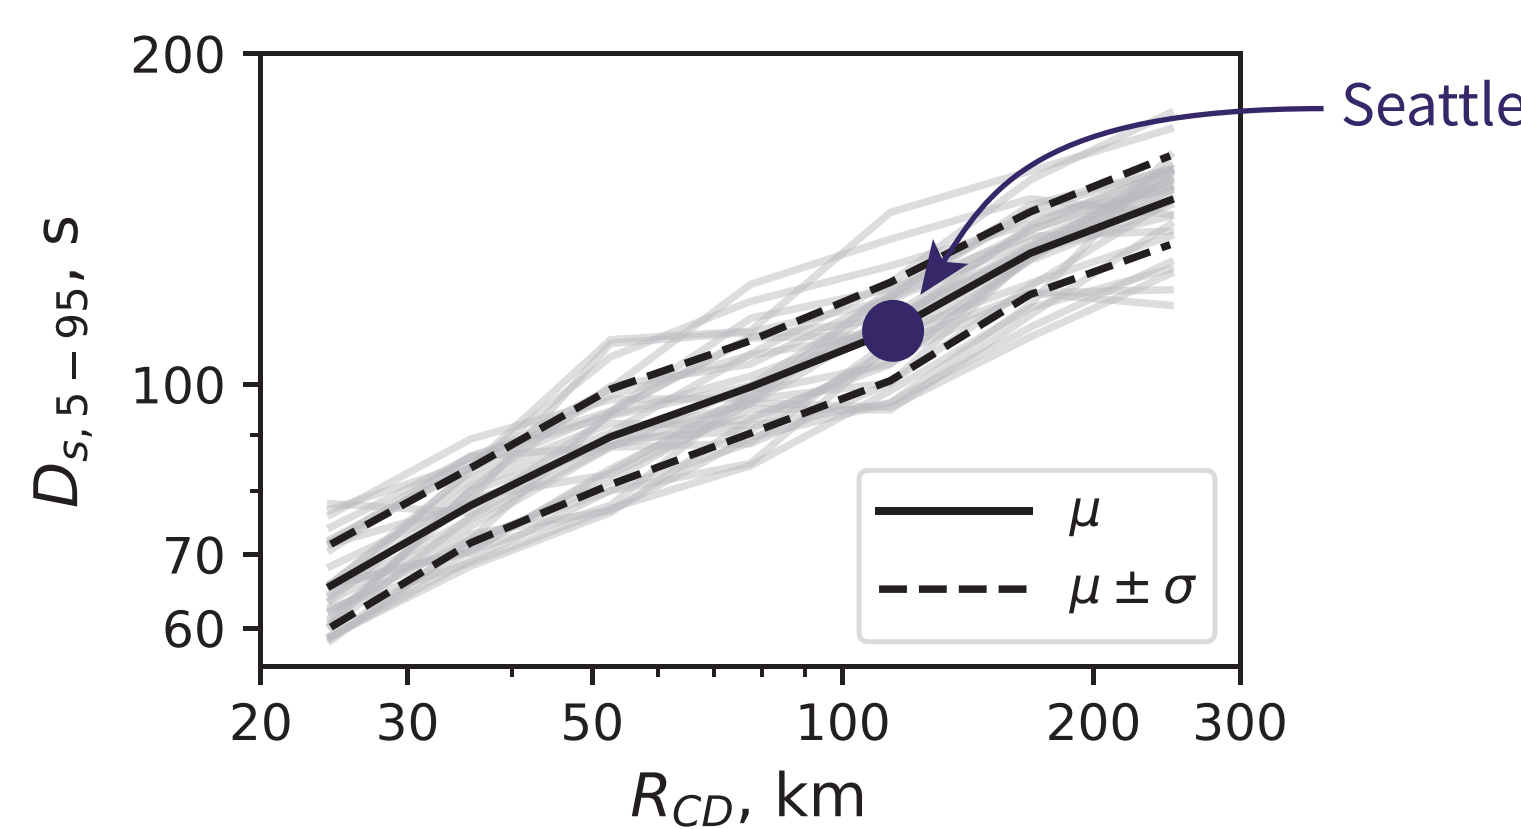

Archetype Development

- The impacts of the M9 CSZ motions on building response were assessed using a suite of archetypes that were developed with engineering firms in Seattle through collaborative efforts with the Structural Engineering Association of Washington.

- Downtown Seattle -Modal Analysis (MRSA)
- R=6, I=1.0 -Site $V_{s30} = 500$ m/s

H < 240'

H ≥ 240'


ASCE 7-10

USGS 2008 NSHM
85% ELF Base Shear

Tall Building Initiative Guidelines


ASCE 7-16

USGS 2014 NSHM
100% ELF Base Shear

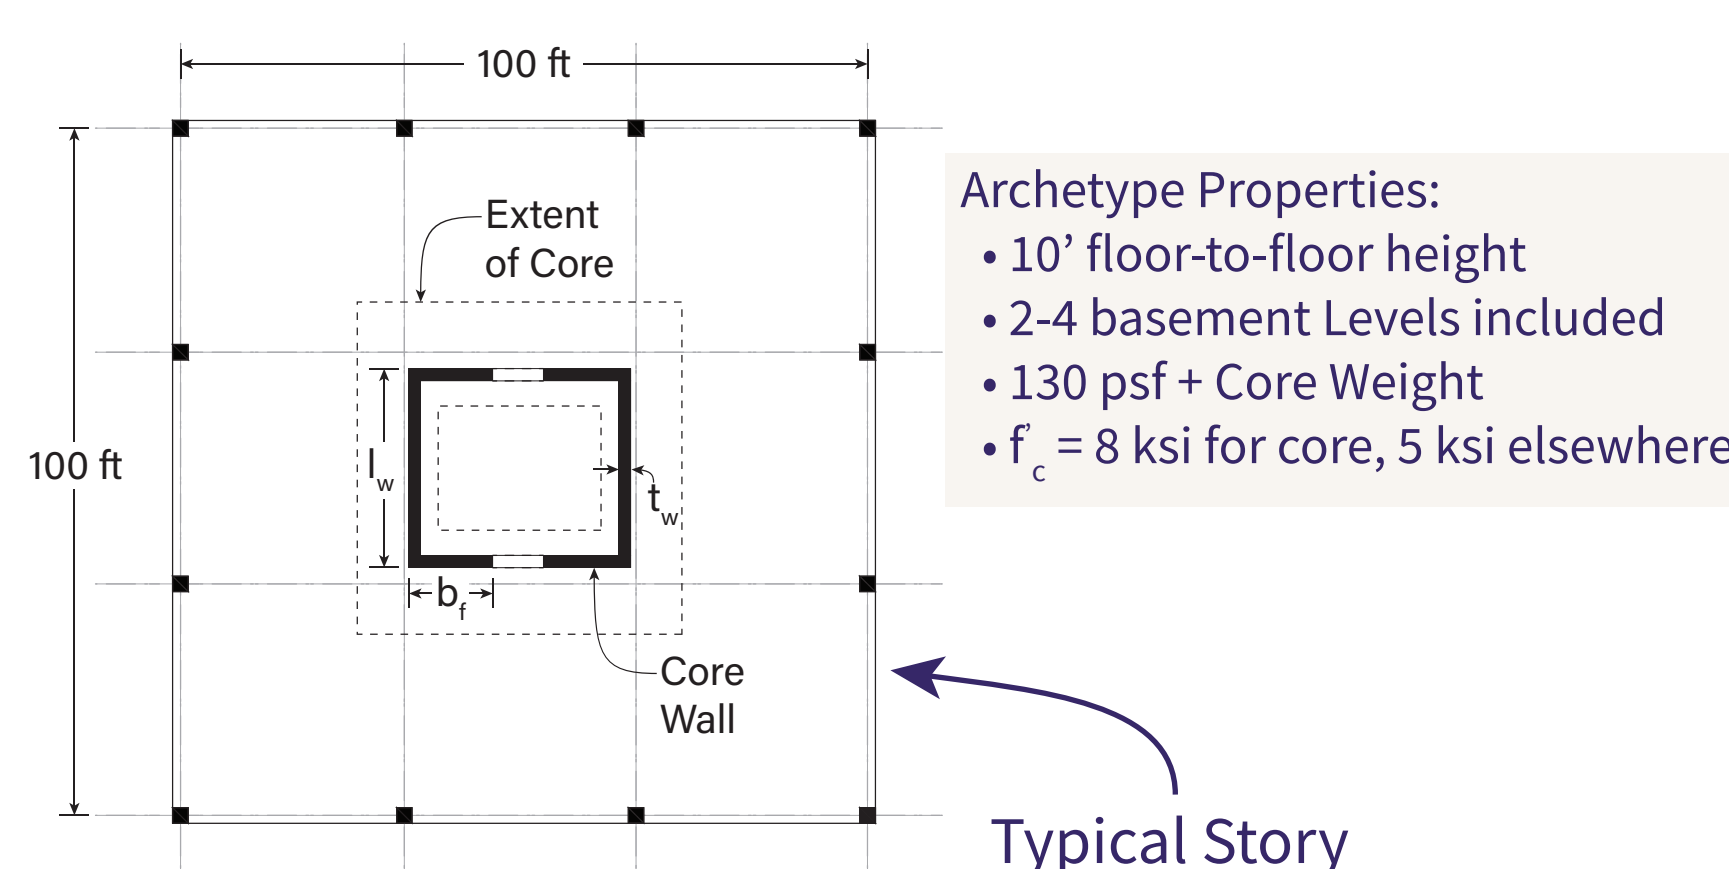



Modeling

- The earthquake response of RC core walls is idealized in a 2-dimensional OpenSees model using non-linear material models that have been calibrated to over 15 experimental test specimens.

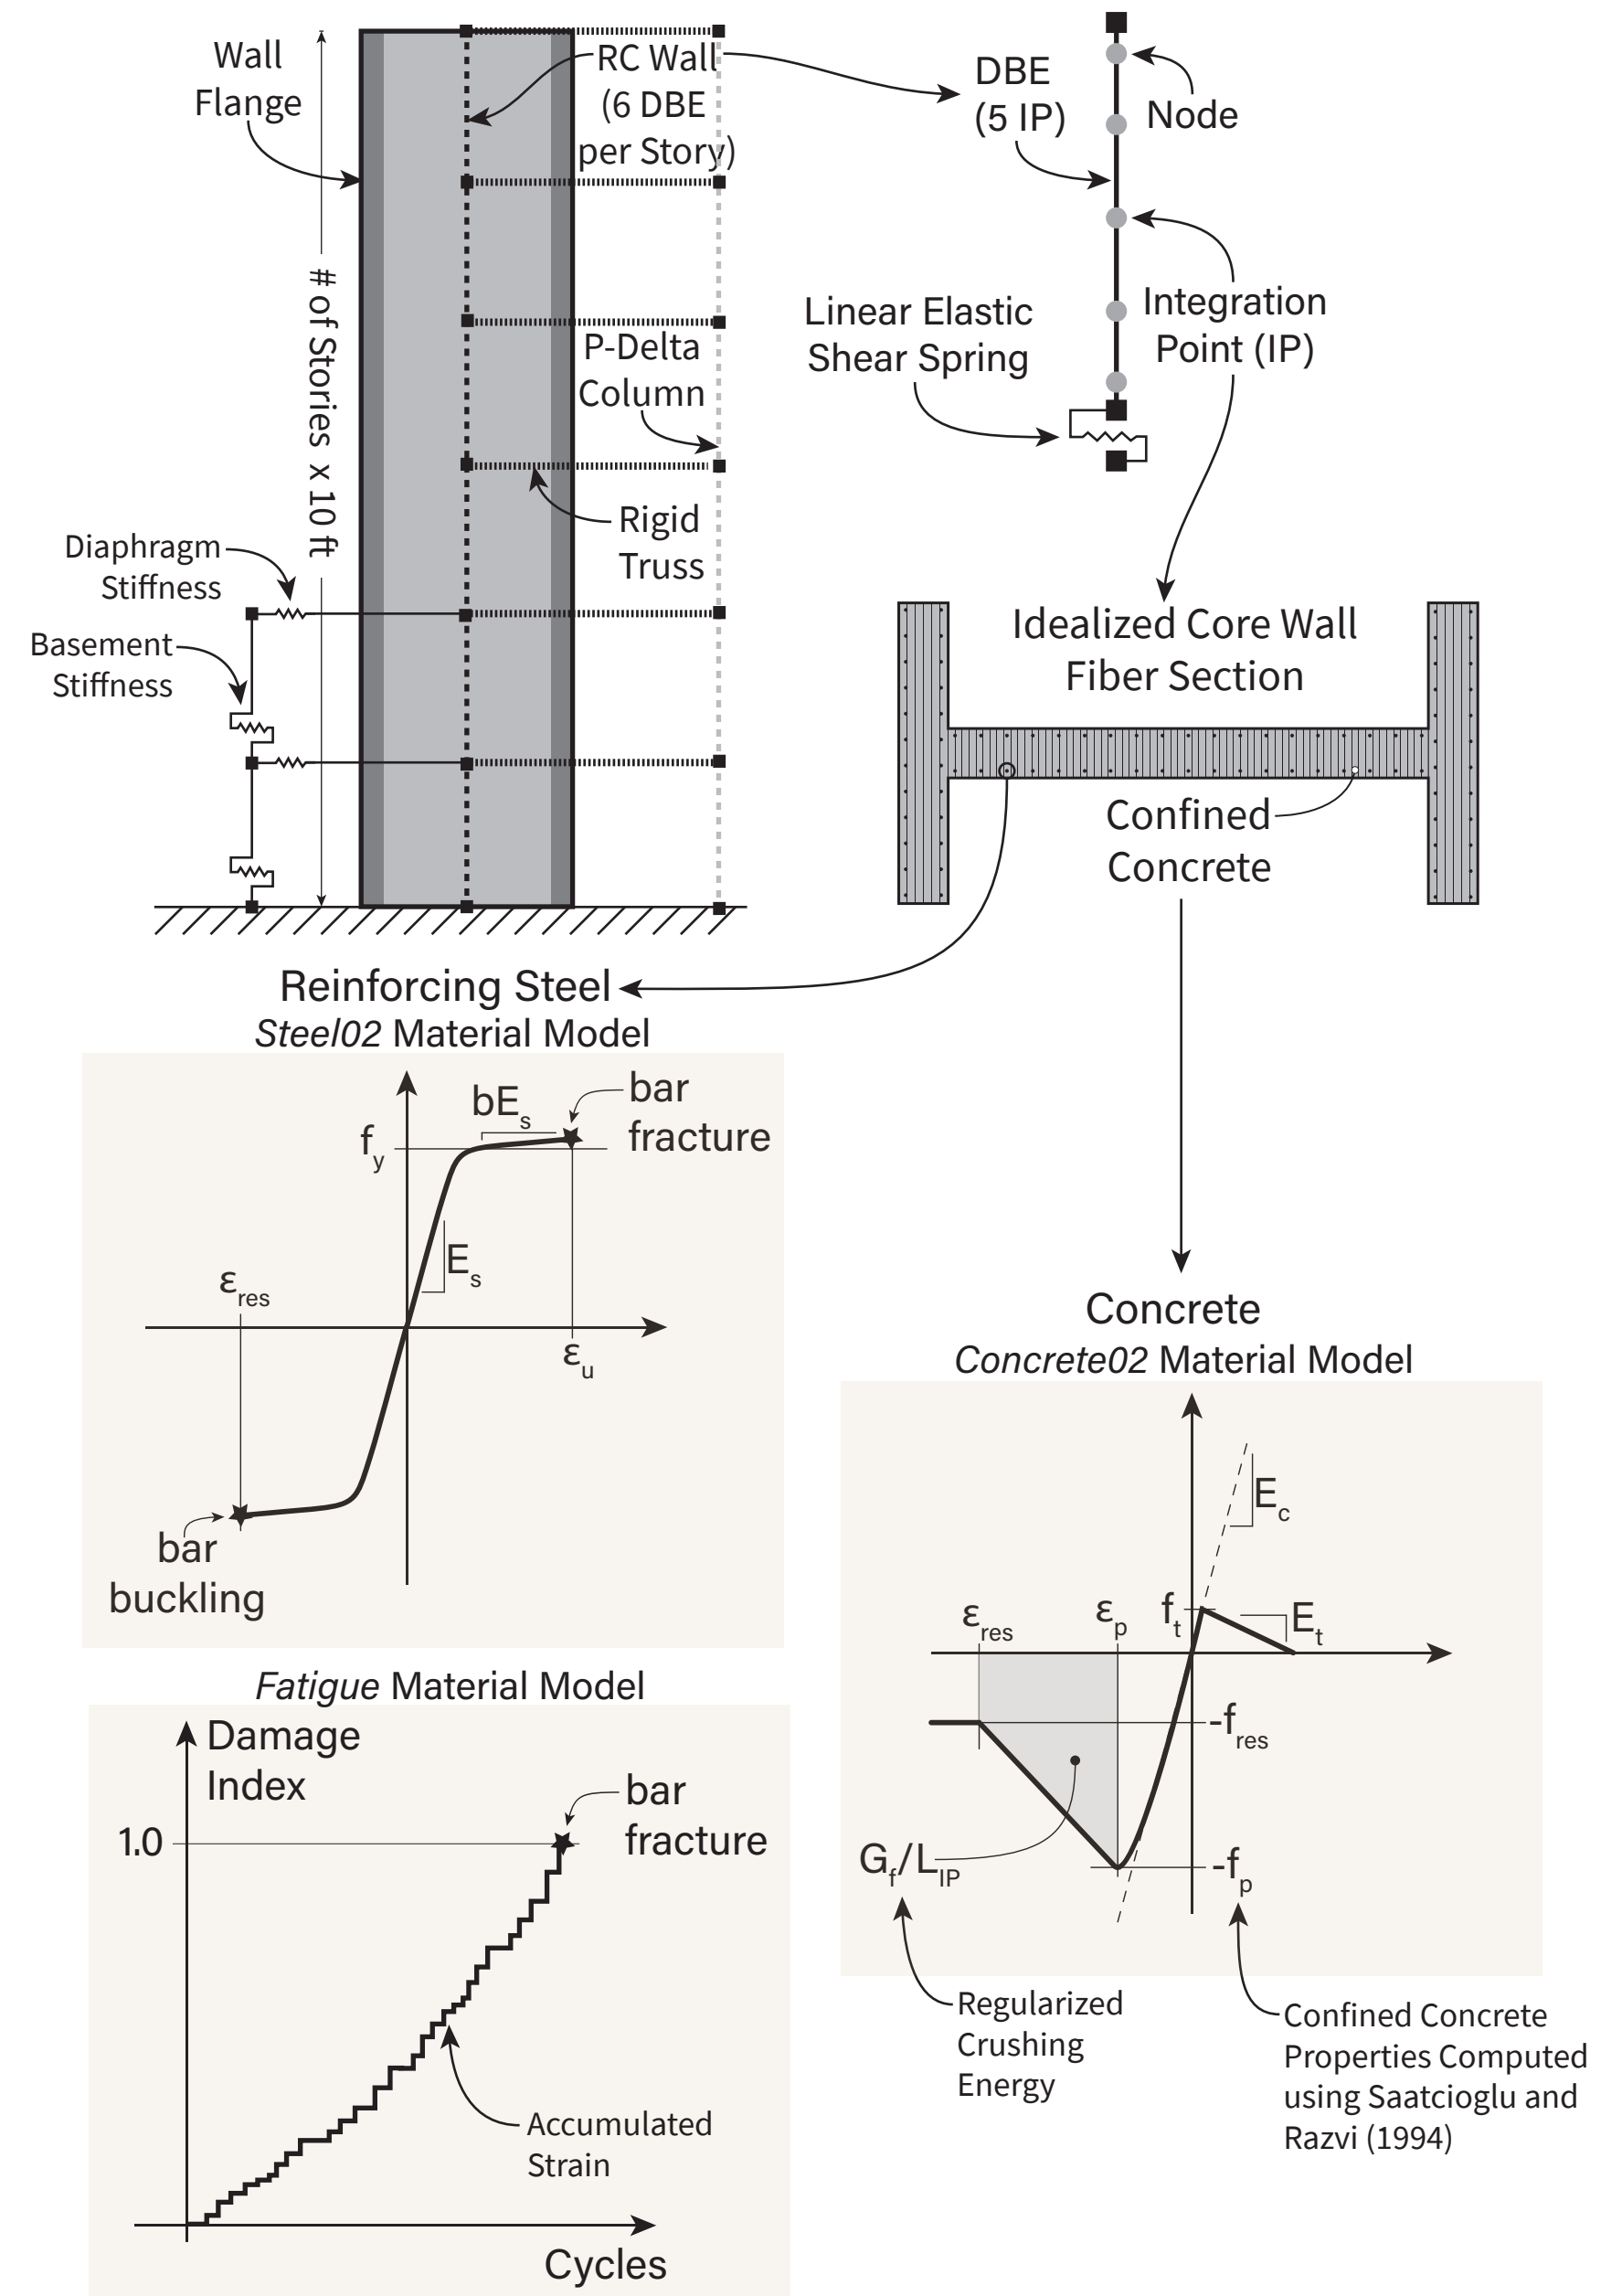

Building Performance

- The engineering demands of each archetype under an M9 CSZ earthquake are compared to those expected from ground-motions selected and scaled to match the conditional mean spectrum (CMS), conditioned at the archetype's period.

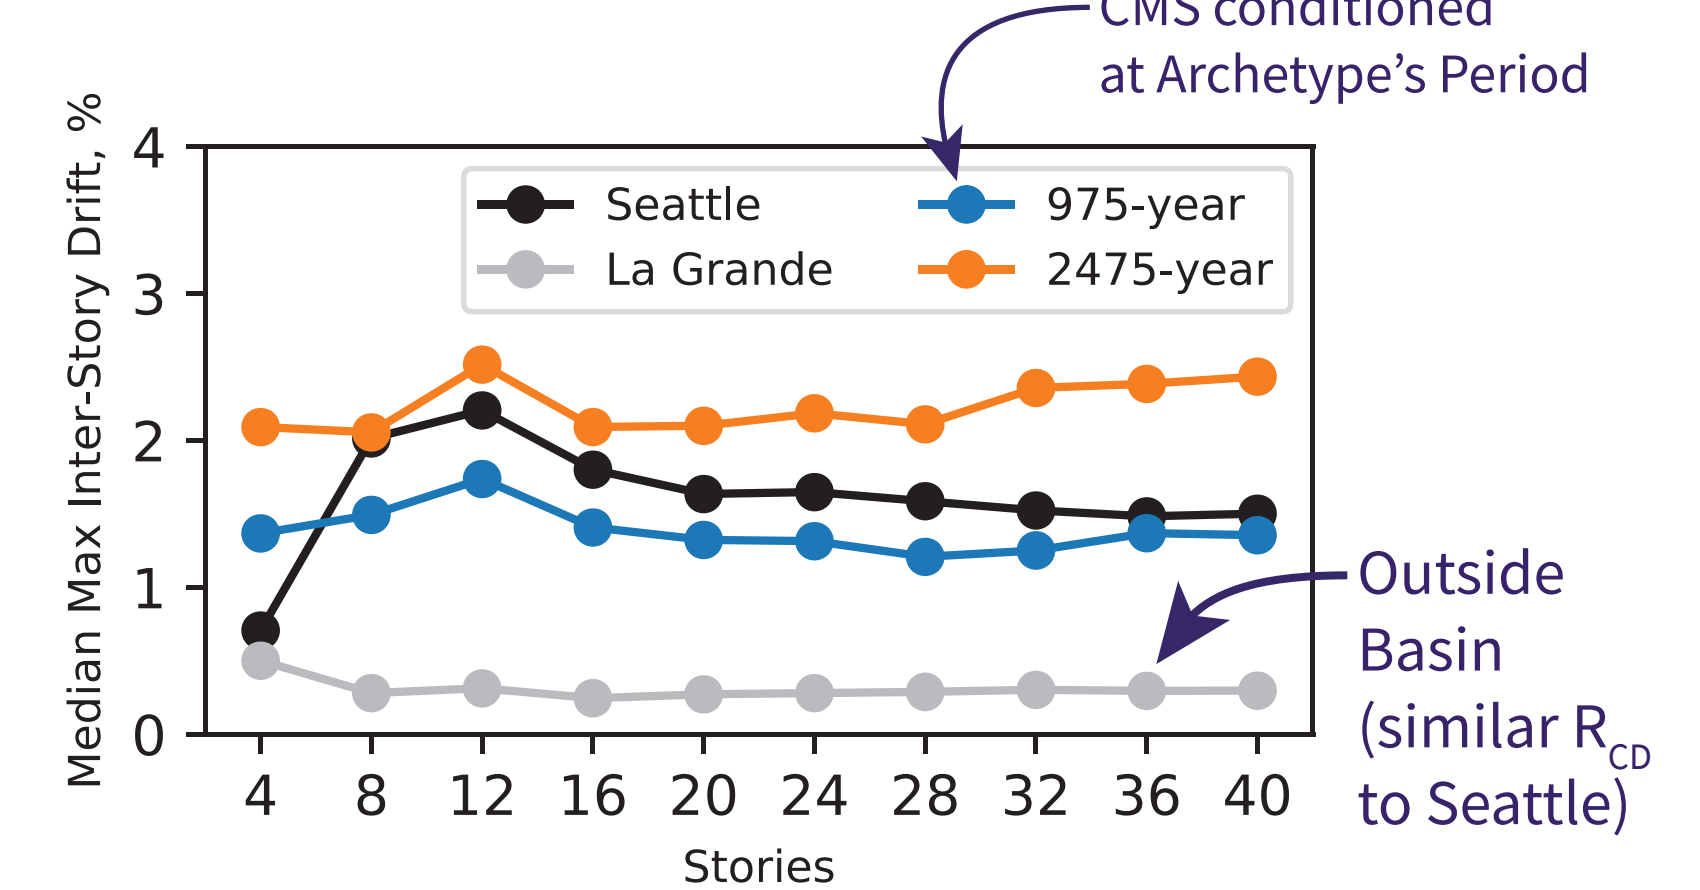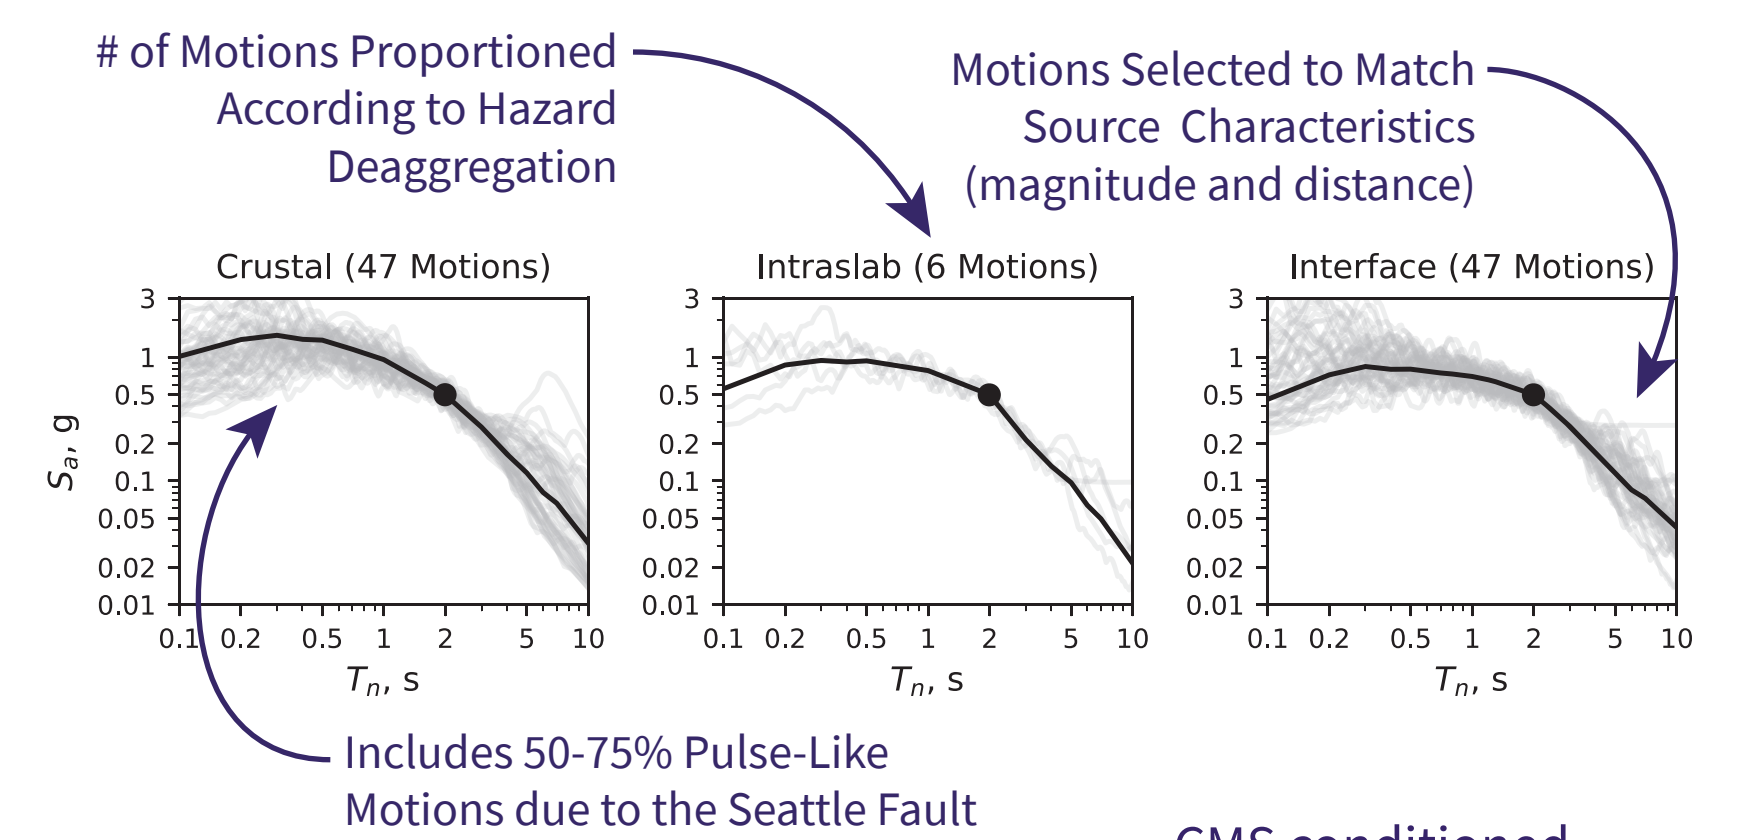

Conclusion

- The ground motions inside the basin (Seattle) were found to have larger spectral accelerations and more damaging spectral shapes.
- The peak drifts under an M9 CSZ earthquake were found to be larger than motions scaled to match the 975-year CMS but less than the 2475-year CMS.

Selected References

Frankel, A., Wirth, E., Marafi, N. A., Vidale, J., & St ephenson, W. (2018). Broadband Synthetic Seismograms for Magnitude 9 Earthquakes on the Cascadia Megathrust Based on 3D Simulations and Stochastic Synthetics: Methodology and Overall Results. Bulletin of the Seismological Society of America. Submitted for USGS review

Marafi, N. A., Eberhard, M. O., Berman, J. W., Wirth, E. A., & Frankel, A. D. (2017). Effects of Deep Basins on Structural Collapse during Large Subduction Earthquakes. Earthquake Spectra, 33(3), 963-997. doi:10.1193/071916EQS114M